




Installation Guides

“B Series” Uninsulated fireboxes

Brick installation

Standard Uninsulated Unit

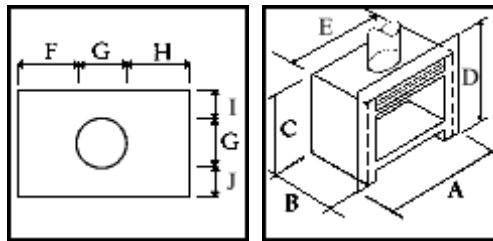


B Series	Dimensions									
Model No	A	B	C	D	E	F	G	H	I	J
B450	590	340	575	670	485	160	165	160	60	115
B650	806	380	595	647	680	247	185	247	85	110
B750	905	435	635	685	785	287	210	287	105	120
B900	1055	480	695	730	935	362	210	362	125	145
Z1200	1300	550	1200	935	1200	450	Refer to Manufacturer			

Brick installation

BUILDING A NEW FIREPLACE

1. Lay brickwork to hearth level.
2. Place HEATMASTER in position on hearth.
3. Lay brickwork to lintel level and place lintel.
4. Install first length of flue.
5. Lay brickwork to ceiling level.
6. Install additional lengths of flue and roof flashing.
7. Fix cowl to top of flue.
8. Light your fire.

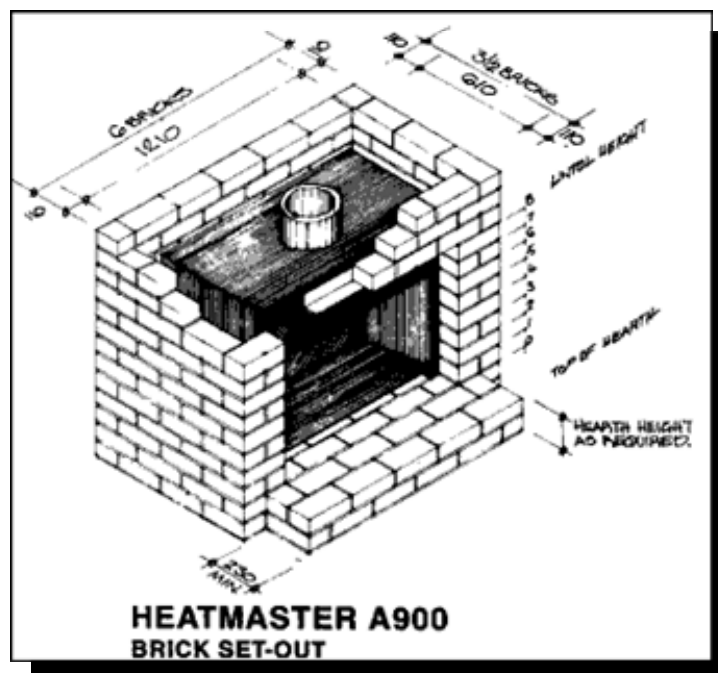

RENOVATING EXISTING FIREPLACES

1. Clean out existing opening, removing old fireplaces, raise lintel and renovate hearth as required. Dimensions shown are the minimum openings necessary.
2. Push HEATMASTER into opening. The fireplace is now complete except for any decorative treatment you may desire.
3. Optional decorative facing may now be affixed if required.

